

Notification of quay wall construction work at Tamashima Harbor Island No.7 Wharf in Mizushima Port

Construction work will be conducted in the eastern area of Tamashima Harbor Island as specified below.

Vessels navigating in the vicinity are advised to proceed with caution.

We apologize for any inconvenience during this work. Your cooperation is appreciated.

1. Construction work period

From July 23rd, 2018 to July 30th, 2019. Regular working time : From sunrise to sunset

2. Construction working area


Working area is bounded by 4 points below.

Point name	Base point	True bearing	Distance
A	From base point	088° 50' .02	1,873m
B	From point A	091° 19' .00	175m
C	From point B	181° 19' .00	525m
D	From point C	271° 19' .00	175m

Base point ★ : Mizushima Port
Tamashima Breakwater Lighthouse.
Lat 34° 29' .772N
Long 133° 39' .797E



Light buoy



3. Contents of Major Works

[Work offshore]


- (1) Jackets installation by crane barge
- (2) PC truss installation by crane barge
- (3) The upper belt conveyor foundation (precast blocks) and the main structure installation by crane barge
- (4) Slab installation by crane barge
- (5) Driving steel pipe piles and receiving temporary piles by pile-driving barge
- (6) Ground improvement work by crane barge

[Work onshore]

- (1) Driving steel pipe piles by crawler crane
- (2) Construction of the main structure (laying concrete) by crawler-crane and concrete pumping truck

4. Safety measures

- (1) 2 patrol boats (with watch flag, banner, rotating light) are deployed to prevent physical contact with construction materials.
- (2) Working area is indicated by 2 light beacons on the shore and 2 light buoys offshore.
- (3) Positions of working boats' anchors are indicated by light buoys.
- (4) During the night working boats stay in the working area.
- (5) Working boats will be evacuated when they present other vessels with any difficulties to navigation

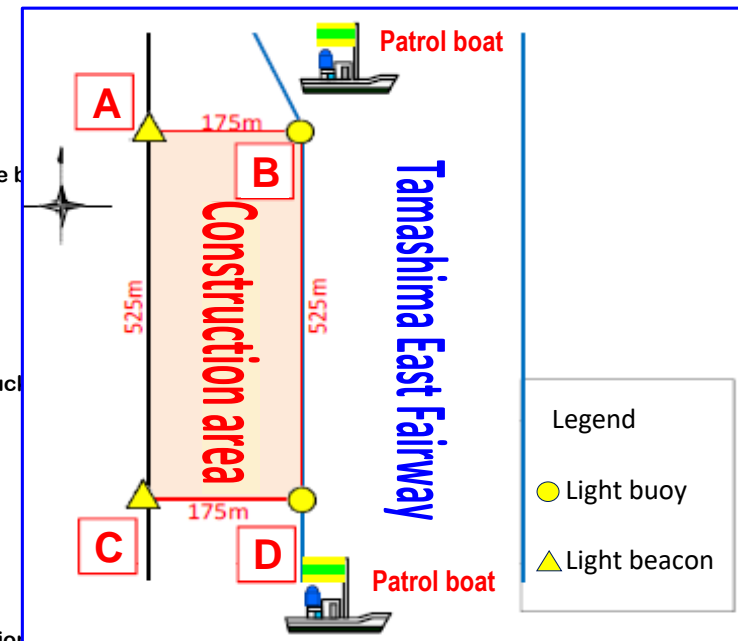

5. Contact

Contractee : Uno Port Office (Mizushima Port Branch Office), Chugoku Regional Development Bureau, Ministry of Land, Infrastructure and Transport
TEL : 086-522-0528

Contractor : Safety Measures Council for quay wall (-12m) construction work in Tamashima area of Mizushima Port
TEL : 086-441-4811